

STAR 350/9 ROTARY RAKE


Fast clean raking of hay and silage for baling. The walking-beam tandem axle provides excellent tracking of ground contours. Adjustable curtain position for variable swath and overall working width.



Photograph for illustration purposes only

FEATURES

- PTO drive shaft with torque limiter
- Closed cam track gearbox in oil bath
- 9 arm / 36 tine rake rotor
- Removable arms for road transport
- Curtain with adjustable position
- Tandem wheels on walking beam
- Pivoting headstock

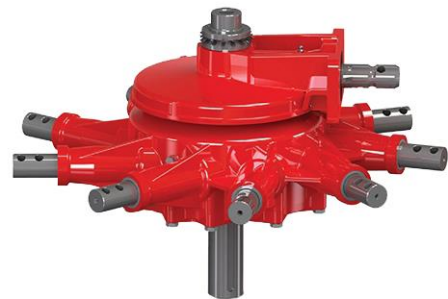

SPECIFICATIONS

Number of arms	9
Tines per Arm	4
Total number of tines	36
Rotor diameter	2.85m
Working width	3.40-3.55m
Weight	405kg
Transport width	2.08m
Transport height	1.53m
Minimum tractor power	45hp
Tyres	15x6

